

JBL

SOUNDPOINT™ SERIES

SP5, SP6, SP6C, SP6CS,
SP8, SP8C

OWNER'S GUIDE

THANK YOU FOR CHOOSING JBL

For more than 50 years, JBL has been involved in every aspect of music and film recording and reproduction, from live performances to monitoring the recordings you play in your home, car or office.


We're confident that the JBL loudspeakers you have chosen will provide every note of enjoyment that you expected – and that when you think about purchasing additional audio equipment for your home, car or office, you will once again choose JBL.

Please take a moment to register your product on our Web site at www.jbl.com. It enables us to keep you posted on our latest advancements, and helps us to better understand our customers and build products that meet their needs and expectations.


JBL Consumer Products

INCLUDED

SP5, SP6, SP8




One pair of speakers with grilles.




Template/paint shield.

Remove paint shield (inner rectangle) at perforation.

SP6C, SP6CS, SP8C



One pair of speakers with grilles (SP6C and SP8C). Model SP6CS includes only one loudspeaker, since it is capable of reproducing two channels of audio.





Template/paint shield.



Remove paint shield (inner circle) at perforation.

SPEAKER PLACEMENT


FRONT SPEAKERS



MODELS SP5, SP6, SP8 AS REAR SPEAKERS



MODELS SP6C, SP6CS, SP8C IN CEILING



Proper placement of the speakers is an important step in obtaining the most realistic soundstage possible. These recommendations are for the optimum placement of the loudspeakers. Use these placement recommendations as a guide. Slight variations will not diminish your listening pleasure.

The front speakers should be placed the same distance from each other as they are from the listening position. They should be placed at about the same height from the floor as the listener's ears will be, with the tweeters aimed toward the listener at ear-level height.

In a home theater configuration, the two surround speakers should be placed slightly behind the listening position and ideally should face each other and be at a level higher than the listener's ears. If that is not possible, they may be placed in a wall (or in the ceiling) behind the listening position, facing

forward. The surround speakers should not call attention to themselves. They should provide a diffuse, ambient sound accompanying the main program material heard in the front speakers. In Dolby® Digital and DTS® systems, aim the tweeters toward the listening position at ear-level height.

MODEL SP6CS


Model SP6CS has the capability of playing two channels through one loudspeaker, thanks to its dual-tweeter/dual-voice-coil construction. Since the tweeters are close together, in general they should be aimed away from each other for best coverage.

For two-channel (stereo) applications, e.g., as a single speaker in a remote room of a distributed audio system, install the SP6CS speaker centrally in the ceiling for best stereo imaging, swiveling the tweeters so that one points toward the left and the other toward the right of the listening position, aimed at ear-level height.

The SP6CS may also be used to play the left and right surround channels in a 5.1-channel home theater system, in which case it should be mounted in the ceiling slightly behind the listening position, centered from left to right and with the tweeters pointing toward the left and right of the listening position, aimed at ear-level height. For 7.1-channel systems where it is desired to use two SP6CS speakers, one to play both the left surround and surround back channels and the other to play both the right surround and surround back channels, mount each SP6CS speaker in the ceiling, slightly behind the listening position, one closer to the left side of the room and the other closer to the right side. Aim the tweeters away from each other, toward the front and rear of the room.


SPEAKER CONNECTIONS

CONNECTION TIPS



The wires for both speakers should be the same length. If one speaker is placed closer to the amplifier than the other, hide the excess wire behind the wall. Speakers and electronics terminals have corresponding (+) and (-) terminals. Most

manufacturers of speakers and electronics, including JBL, use red to denote the (+) terminal and black for the (-) terminal. It is important to connect both speakers identically: (+) on the speaker to (+) on the amplifier and (-) on the speaker to (-) on the amplifier. Wiring “out of phase” results in thin sound, weak bass and a poor stereo image. With the advent of multi-channel surround sound systems, connecting all of the speakers in your system with the correct polarity remains equally important in order to preserve the proper ambience and directionality of the program material.

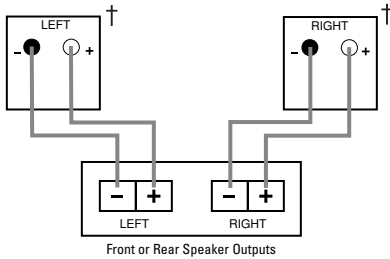

† For model SP6CS, the terminals for both the left and right channels will be on the same loudspeaker.

WIRE LENGTH

- Up to 20 ft.
- Up to 30 ft.
- Greater than 30 ft.

RECOMMENDED SIZE

- 16 gauge
- 12 gauge
- 10 gauge

To use the push-type speaker terminals, press the red (+) or black (-) cap for the desired terminal, insert the bare end of the speaker wire into the hole below the cap and release the cap. Gently tug on the wire to make sure that it is fully inserted.

INSTALLATION

The SoundPoint Series in-wall speakers were designed to be easily installed. However, if you are unsure of your ability to properly install these loudspeakers, please contact your dealer or a qualified installer.

TOOLS NEEDED




Pencil




Phillips #2 screwdriver




Measuring tape



Utility knife




Carpenter's level




Awl

EXISTING CONSTRUCTION


SP5, SP6, SP8




Remove the grille from the speaker frame by pulling on the paper tab. If the tab is missing, to avoid scratching the grille or baffle you may unfold a paper clip, insert the straight end through one of the holes in the grille, and gently pull up.




Determine the correct speaker location.
Note: Remove the inner template, which is the paint shield, at the perforation. Use the outer template when cutting the drywall.




Note: Always allow at least one-half inch between a wall stud and the speaker cutout or the locking tabs will not be able to swivel into place.




Cut the drywall.



Connect the speaker wires to the speaker.




Place the frame assembly in the wall.



Screw down each of the four Phillips head screws. The locking tabs will swivel into place and secure the unit to the rear surface of the drywall.


The SoundPoint speakers feature unique swivel mounts for the tweeters that enable you to aim the very directional high frequencies toward the listening position, at ear-level height. Before installing the speaker grille, gently press on the outer edge of the tweeter mount to adjust the position of the tweeter. The tweeter will not swivel more than 15 degrees in any direction; do not attempt to force it to move further. You may also rotate the tweeter to orient the JBL logo as desired.




Replace the metal grille.

EXISTING CONSTRUCTION

SP6C, SP6CS, SP8C




Remove the grille from the speaker frame by pulling on the paper tab. If the tab is missing, to avoid scratching the grille or baffle you may unfold a paper clip, insert the straight end through one of the holes in the grille, and gently pull up.




Determine the correct speaker location.

Note: Remove the inner template, which is the paint shield, at the perforation. Use the outer template when cutting the drywall.




Cut the drywall.


Note: Always allow at least one-half inch between a wall stud and the speaker cutout or the locking tabs will not be able to swivel into place.



Connect the speaker wires to the speaker. Model SP6CS requires two sets of speaker wires, one for each channel.



Place the frame assembly in the wall.




Screw down each of the four Phillips head screws. The locking tabs will swivel into place and secure the unit to the rear surface of the drywall.

The SoundPoint speakers feature unique swivel mounts for the tweeters that enable you to aim the very directional high frequencies toward the listening position, at ear-level height. Before installing the speaker grille, gently press on the outer edge of the tweeter mount to adjust the position of the tweeter. The tweeter will not swivel more than 15 degrees in any direction; do not attempt to force it to move further. You

may also rotate the tweeter to orient the JBL logo as desired.

The dual tweeters of the SP6CS speaker may be swiveled independently. Optimum imaging will be obtained by aiming the tweeters to the left and right of the listening position, at ear-level height, if your application permits.



Replace the metal grille.

NEW CONSTRUCTION

You will need to purchase the correct rough-in frame kit for your model:

Speaker Model	Rough-In Frame Kit
SP5	RIF5
SP6	RIF6
SP6C	RIF6C
SP6CS	RIF6CS
SP8	RIF8
SP8C	RIF8C

Detailed installation instructions are supplied with the rough-in kit.

PAINTING THE SPEAKER FRAME AND GRILLE

SoundPoint Series loud-speakers can be painted to match any decor. If you wish to change their color, the satin finish on the grille and frame will function as a primer coat. Before painting, install the paint shield (inner section of template in the assembly kit) securely into the recess in the

baffle. This will protect the speaker components and baffle from paint residue. Use a high-quality spray paint, and apply a thin coat of color.

Be certain the grille perforations remain free of paint. Filling them with paint will diminish the sound quality.

Note: Gently remove the acoustical foam blanket from the grille before painting. Reattach the blanket after the paint has dried.

TROUBLESHOOTING

IF THERE IS NO SOUND FROM ANY OF THE SPEAKERS:

- Check that receiver/amplifier is on and a source is playing.
- Check all wires and connections between receiver/amplifier and speakers. Make sure all wires are connected. Make sure none of the speaker wires are frayed, cut, punctured or touching each other.
- Review proper operation of your receiver/amplifier.

IF THERE IS NO SOUND COMING FROM ONE SPEAKER:

- Check the "Balance" control on your receiver/amplifier.
- Check all wires and connections between receiver/amplifier and speakers. Make sure all wires are connected. Make sure none of the speaker wires

are frayed, cut, punctured or touching each other.

IF THERE IS LOW (OR NO) BASS OUTPUT:

- Make sure the connections to the left and right "Speaker Inputs" have the correct polarity (+ and -).
- Consider adding a powered subwoofer to your system.
- In Dolby Digital or DTS modes, make sure your receiver/processor is correctly configured. When using a subwoofer, make sure the subwoofer output of the receiver/processor has been enabled. If no subwoofer is being used, make sure the left and right front and rear speakers have been configured as "LARGE." See your receiver/processor's owner's manual for further information

on correct speaker configuration in Dolby Digital, DTS and other surround sound modes.

IF THE SYSTEM PLAYS AT LOW VOLUMES BUT SHUTS OFF AS VOLUME IS INCREASED:

- Check all wires and connections between receiver/amplifier and speakers. Make sure all wires are connected. Make sure none of the speaker wires are frayed, cut, punctured or touching each other.
- If more than one pair of main speakers is being used, check the minimum-impedance requirements of your receiver/amplifier.

SPECIFICATIONS

SP5

Frequency Response
45Hz–20kHz (–10dB)

Recommended Maximum Amplifier Power †
60 watts

Impedance
8 ohms nominal

Sensitivity (2.83V/1m)
87dB

Crossover Frequency
3,000Hz

Woofer
5-1/4" titanium-laminate cone w/rubber surround

Tweeter
1" titanium-laminate dome, w/Elliptical Oblate Spheroidal™ waveguide and swivel mount

Plate Size (W x H)
191 x 254mm (7-1/2" x 10")

Mounting Cutout Size (W x H)
156 x 221mm (6-1/8" x 8-11/16")

Mounting Depth
95mm (3-3/4")

Weight per Speaker
1.8kg (4 lb)

SP6

Frequency Response
38Hz–20kHz (–10dB)

Recommended Maximum Amplifier Power †
80 watts

Impedance
8 ohms nominal

Sensitivity (2.83V/1m)
88dB

Crossover Frequency
2,800Hz

Woofer
6-1/2" titanium-laminate cone w/rubber surround

Tweeter
1" titanium-laminate dome, w/Elliptical Oblate Spheroidal™ waveguide and swivel mount

Plate Size (W x H)
216 x 279mm (8-1/2" x 11")

Mounting Cutout Size (W x H)
181 x 246mm (7-1/8" x 9-11/16")

Mounting Depth
98mm (3-7/8")

Weight per Speaker
2.3kg (5 lb)

SP6C

Frequency Response
40Hz–20kHz (–10dB)

Recommended Maximum Amplifier Power †
80 watts

Impedance
8 ohms nominal

Sensitivity (2.83V/1m)
88dB

Crossover Frequency
2,600Hz

Woofer
6-1/2" titanium-laminate cone w/rubber surround

Tweeter
1" titanium-laminate dome, w/swivel mount

Plate Size (Diameter)
233mm (9-3/16")

Mounting Cutout Size (Dia.)
200mm (7-7/8")

Mounting Depth
108mm (4-1/4")

Weight per Speaker
2.0kg (4.5 lb)

SP6CS

Frequency Response
40Hz–20kHz (–10dB)

Recommended Maximum Amplifier Power †
100 watts total (50W/PC)

Impedance
8 ohms nominal per input

Sensitivity (2.83V/1m)
88dB, both channels driven

Crossover Frequency
2,600Hz

Woofer
6-1/2" titanium-laminate cone w/rubber surround

Tweeter
Dual 3/4" titanium-laminate domes, w/swivel mounts

Plate Size (Diameter)
233mm (9-3/16")

Mounting Cutout Size (Dia.)
200mm (7-7/8")

Mounting Depth
108mm (4-1/4")

Weight per Speaker
1.8kg (4 lb)

SP8

Frequency Response
30Hz–20kHz (–10dB)

Recommended Maximum Amplifier Power †
100 watts

Impedance
8 ohms nominal

Sensitivity (2.83V/1m)
89dB

Crossover Frequency
2,400Hz

Woofer
8" titanium-laminate cone w/rubber surround

Tweeter
1" titanium-laminate dome, w/Elliptical Oblate Spheroidal™ waveguide and swivel mount

Plate Size (W x H)
257 x 333mm (10-1/8" x 13-1/8")

Mounting Cutout Size (W x H)
225 x 300mm (8-7/8" x 11-13/16")

Mounting Depth
102mm (4")

Weight per Speaker
3.5kg (7.8 lb)

SP8C

Frequency Response
32Hz–20kHz (–10dB)

Recommended Maximum Amplifier Power †
100 watts

Impedance
8 ohms nominal

Sensitivity (2.83V/1m)
89dB

Crossover Frequency
2,400Hz

Woofer
8" titanium-laminate cone w/rubber surround

Tweeter
1" titanium-laminate dome, w/swivel mount

Plate Size (Diameter)
275mm (10-7/8")

Mounting Cutout Size (Dia.)
240mm (9-1/2")

Mounting Depth
108mm (4-1/4")

Weight per Speaker
2.5kg (5.6 lb)

All features and specifications are subject to change without notice.

† The maximum recommended amplifier power rating will ensure proper system headroom to allow for occasional peaks. We do not recommend sustained operation at these maximum power levels.

* Trademark of Dolby Laboratories.

DTS is a registered trademark of Digital Theater Systems, Inc.

Declaration of Conformity



We, Harman Consumer Group International
2, route de Tours
72500 Chateau-du-Loir
France

declare in our own responsibility that the products described in this owner's manual are in compliance with technical standards:

EN 61000-6-3:2001
EN 61000-6-1:2001

G. Am.
Gary Marell

Harman Consumer Group International
Chateau-du-Loir, France 9/04

OWNER'S GUIDE

PRODUCT LINE: SOUNDPOINT™ SERIES

MODELS:
SP5, SP6, SP6C, SP6CS, SP8, SP8C

DESIGN GOAL: Combine the superior performance of traditional JBL loudspeakers with the convenience of in-wall installation.

TWEETER TYPE: Titanium-laminate-dome with swivel mount

WOOFER TYPE: Titanium-laminate cone with rubber surround

CROSSOVER NETWORK: Straight-Line Signal Path™ (SSP)

PROFESSIONAL REFERENCE: Studio Monitor

**PRO SOUND
COMES HOME™**

JBL Consumer Products
250 Crossways Park Drive, Woodbury, NY 11797
Europe: 2. Route de Tours, 72500 Chateau du Loir, France
www.jbl.com

NOTE: For new-construction applications, be sure to purchase the correct rough-in frame kit.

©2004 Harman International Industries, Incorporated

JBL is a registered trademark of Harman International Industries, Incorporated.

Part No. 406-000-05033 9/04

H A Harman International Company